

OUR NEW P12D PROBES DESERVED A VERY SPECIAL DISPLAY UNIT!

New outstanding design, touchscreen and shockproof display unit for P12D digital probes with M8 connectors.





Display unit D62S

- **4.3" touchscreen color display protected against liquids**
- Resolution up to 0.01 μm
- **Aluminium case with shockproof rubber protection**
- IP54 protected
- **Back side with 2 inputs for P12D probes with M8 connectors**
- Advanced version with Bluetooth[®], integrated battery and indication of the global tolerance status



Display unit D62S

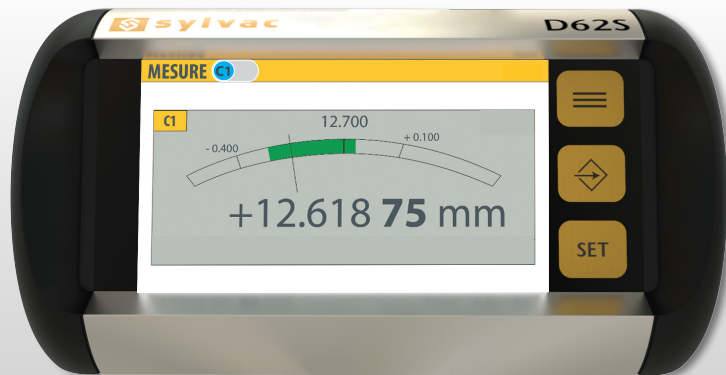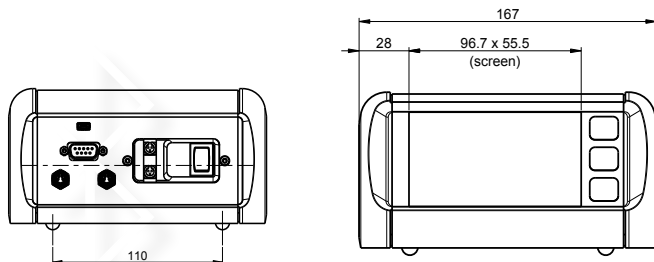

D62S Standard version



TECHNICAL SPECIFICATIONS

| Specifications | 804.1062 | 804.1063 ¹⁾ |
|---------------------------------|---|--|
| Version | D62S Standard | D62S Advanced |
| Display | 4,3" touchscreen color display | |
| Resolution | Selectable, up to 0.01µm | |
| Construction | Aluminium case with thermoplastic elastomer | |
| Protection | Front screen protected IP54 | |
| Dimensions | 167 x 90 x 90mm | |
| Weight | 750g | |
| Inputs | 2 x M8 connectors for P12D-M8 probes | |
| Connections | RS232, Mini-USB (Virtual COM, HID), 1 footpedal ²⁾ | RS232, Mini-USB (Virtual COM, HID), Bluetooth®, 2 footpedals ²⁾ |
| Tolerances | Go-NoGo, Int, Ext | Go-NoGo, Int, Ext |
| Basic functions | A, B, A-B, A+B | A, B, A-B, A+B |
| Global tolerances LED Indicator | - | ✓ |
| Formula / MIN-MAX-DELTA | - | ✓ |
| Time/date display | - | ✓ |
| Battery | - | ✓ (autonomy 1 day) |

¹⁾ Available 2nd quarter 2017 ²⁾ see cables chapter of Sylvac catalogue